


**Exterior hardware**

Lock guards, viewers, knockers and mail slots

# Lock guards, viewers knockers and mail slots

Ives provides exterior hardware designed to handle any weather and has a solution for any application needs. Ives offers a line of lock guards, all designed to fit specific door styles, lock types and trim types. Many designs of viewers, knockers, and mail slots are offered for front doors.

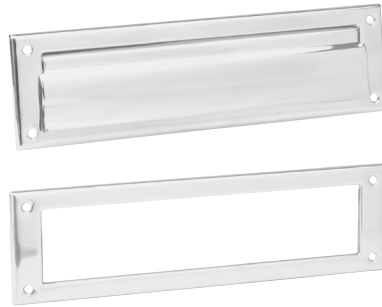

## Exterior hardware

### Lock guards

# LG1 / LG7

#### Lock guard (with and without security pin)

- LG1 incorporates security frame pin to prevent separation of the door and frame  
LG7 does not incorporate the security frame pin
- Ideal for use with mortise or cylindrical locks
- Unit covers the latch bolt area of the door and lock, thereby providing added protection from burglars, vandals or normal abuse
- Non-handed
- Easy installation
- Through bolted with carriage bolts and nuts

#### Specifications

Material substrate	Made from 13 gauge stainless steel, 12 gauge steel (LG1 only) or brass (LG1 only)
Certifications	UL10C Listed (3 hour)

#### Dimensions

W x H	Bolt center to center
3" x 11 1/2"	10 1/2"

#### Finishes

BHMA	Description	Substrate	Finish
600*	Primed for paint	Steel	USP
603*	Zinc plated	Steel	US2G
695*	Dark bronze painted	Steel	SP313
606*	Satin brass	Brass	US4
612*	Satin bronze	Brass	US10
630	Satin stainless	Stainless steel	US32D

\*Not available on LG7. For other colors, consult factory.

# LG10

#### Lock guard

- Ideally suited for use with rose or escutcheon 2 3/4" wide or less
- For use with type 86 mortise and type 161 cylindrical locks (ANSI/BHMA 156.13 Series 1000 and ANSI/BHMA 156.2 Series 4000)
- Unique design provides maximum security, virtually eliminating the opening between door and frame at the latch point
- Non-handed
- 2 welded mounting studs. No exposed fasteners on face of unit

#### Specifications

Material substrate	Made from 13 gauge stainless steel, 12 gauge steel
Certifications	UL10C Listed (3 hour)

#### Dimensions

W x H	Stud center to center
2 1/2" x 9 1/2"	8 1/2"

#### Finishes

BHMA	Description	Substrate	Finish
600	Primed for Paint	Steel	USP
630	Satin Stainless	Stainless steel	US32D

For other colors, consult factory.

#### Available accessories

- Security pin fasteners



## Exterior hardware

### Lock guards

# LG11

#### Lock guard - aluminum doors

- Designed for use on aluminum doors with latch-type locks or doors equipped with electric strikes
- Unique design provides maximum security, virtually eliminating the opening between door and frame at latch point
- Unit is handed - Specify left or right hand when ordering (order RH for LHR door, and LH for RHR door)
- 2 welded mounting studs (no exposed fasteners on face of unit)

#### Specifications

Material substrate	Made from 13 gauge stainless steel, 12 gauge steel
Certifications	UL10C Listed (3 hour)

#### Dimensions

<b>W x H</b>	<b>Stud center to center</b>
3" x 9 1/2"	8 1/2"

#### Finishes

BHMA	Description	Substrate	Finish
630	Satin Stainless	Stainless steel	US32D
695	Dark Bronze Painted	Steel	SP313

For other colors, consult factory.

#### Available accessories

- Security pin fasteners



RH (LHR) shown

# LG12

#### Lock guard - narrow

- Narrow design unit for use on rose or escutcheon 3 1/2" or less
- For use with type 86 mortise and type 161 cylinder locks (ANSI/BHMA 156.13 Series 1000 and ANSI/BHMA 156.2 Series 4000)
- Unique design provides maximum security, virtually eliminating the opening between door and frame at the latch point
- Non-handed
- 2 welded mounting studs (no exposed fasteners on face of unit)

#### Specifications

Material substrate	Made from 13 gauge stainless steel, 12 gauge steel
Certifications	UL10C Listed (3 hour)

#### Dimensions

<b>W x H</b>	<b>Stud center to center</b>
2 1/2" x 9 1/2"	8 1/2"

#### Finishes

BHMA	Description	Substrate	Finish
600	Primed for Paint	Steel	USP
630	Satin Stainless	Stainless steel	US32D

For other colors, consult factory.

#### Available accessories

- Security pin fasteners



## Exterior hardware

### Lock guards

# LG13

#### Lock guard

- Designed for use on all type 161 cylindrical locks (ANSI/BHMA 156.2 Series 2000) Monolock and Unilock
- Unique design provides maximum security, virtually eliminating the opening between door and frame at latch point
- Non-handed
- 2 welded mounting studs (no exposed fasteners on face of unit)

#### Specifications

Material substrate	Made from 13 gauge stainless steel, 12 gauge steel
Certifications	UL10C Listed (3 hour)

#### Dimensions

W x H	Stud center to center
1 1/2" x 7"	4 1/2"



#### Finishes

BHMA	Description	Substrate	Finish
600	Primed for Paint	Steel	USP
630	Satin Stainless	Stainless steel	US32D

For other colors, consult factory.

#### Available accessories

- Security pin fasteners

# LG14

#### Lock guard - with electric strike

- Narrow design unit for use on rose or escutcheon 3 1/2" or less
- For use with Von Duprin 6210 and 6211 electric strike
- No exposed fasteners on face of unit
- Unique design provides maximum security, virtually eliminating the opening between door and frame at latch point
- Non-handed
- 4 welded mounting studs. No exposed fasteners on face of unit

#### Specifications

Material substrate	Made from 13 gauge stainless steel
Certifications	UL10C Listed (3 hour)

#### Dimensions

W x H	Stud center to center
2 9/16" x 9 1/2"	4 1/2" and 6 3/4"



#### Finishes

BHMA	Description	Substrate	Finish
630	Satin Stainless	Stainless steel	US32D

For other colors, consult factory.

#### Available accessories

- Security pin fasteners

## Exterior hardware

### Viewers

# U696

#### One-way viewer - UL

- 150° angle of view
- For doors 1 3/8" to 2 1/16" thick
- Secure, tamper-resistant one-way thread installation
- Simple installation — only a 1/2" hole required
- Suggested installation height: 60" from floor



#### Specifications

Certifications	<ul style="list-style-type: none"> <li>▪ Meets ANSI/BHMA A156.16, L23222</li> <li>▪ UL10C Listed (90 min)</li> </ul>
----------------	--

#### Dimensions

<b>External diameter</b>	3/4"
--------------------------	------

#### Finishes

BHMA	Description	Substrate	Finish
606	Satin Brass	Brass	B4
613	Oil Rubbed Bronze	Brass	B10B
619	Satin Nickel	Brass	B15
622	Matte Black	Brass	B-BLK
625	Bright Chrome	Brass	B26
626	Satin Chrome	Brass	B26D
—	Aged Bronze	Brass	B-643e/716

For other colors, consult factory.

#### Available accessories

- Trim washer available, 3/4" x .032" thick
- Extensions available for thicker doors
- Privacy viewer covers to prevent viewing from outside the room

# 698 / U698

#### One-way wide angle viewer (UL and non UL models)

- 190° angle of view
- 4 optical glass lenses
- For doors 1 3/8" to 2 1/8" thick
- Simple installation — only a 9/16" hole required
- Suggested installation height: 60" from floor



#### Specifications

Certifications	<ul style="list-style-type: none"> <li>▪ Meets ANSI/BHMA A156.16, L23222</li> <li>▪ U698 is UL10C Listed (90 min)</li> </ul>
----------------	--

#### Dimensions

<b>External diameter</b>	<b>Lens projection</b>
1"	1/4" from face of door

#### Finishes

BHMA	Description	Substrate	Finish
605	Bright brass	Brass	B3
619*	Satin nickel	Brass	B15
622*	Matte black	Brass	B-BLK
625*	Bright chrome	Brass	B26
626	Satin chrome	Brass	B26D
—	Aged bronze	Brass	B-643e/716

\*Not available on 698. For other colors, consult factory.

#### Available accessories

- Extensions available for thicker doors
- Privacy viewer covers to prevent viewing from outside the room

## Exterior hardware

### Viewers

# 700 / U700

#### One-way narrow viewer (UL and non-UL models)

- 120° angle of view
- For doors 1<sup>3</sup>/<sub>8</sub>" to 2<sup>1</sup>/<sub>16</sub>" thick
- Secure, tamper-resistant one-way thread installation
- Simple installation—only a 1/2" hole required
- Suggested installation height: 60" from floor

#### Specifications

Material substrate	Made from brass, glass lens
Certifications	<ul style="list-style-type: none"> <li>▪ 700 meets ANSI/BHMA A156.16, L23173</li> <li>▪ U700 meets ANSI/BHMA A156.16, L23223</li> <li>▪ U700 is UL10C Listed (90 min)</li> </ul>

#### Dimensions

External diameter	5/8"
-------------------	------



#### Available accessories

- Trim washer available, 3/4" x .032" thick
- Extensions available for thicker doors
- Privacy viewer covers to prevent viewing from outside the room

# 701 / U701

#### One-way narrow wide angle viewer (UL and non UL models)

- 120° angle of view
- For doors 2<sup>1</sup>/<sub>8</sub>" to 2<sup>5</sup>/<sub>8</sub>" thick
- Secure, tamper-resistant one-way thread installation
- Simple installation—only a 1/2" hole required
- Suggested installation height: 60" from floor

#### Specifications

Material substrate	Made from brass, glass lens
Certifications	<ul style="list-style-type: none"> <li>▪ 701 meets ANSI/BHMA A156.16, L23173</li> <li>▪ U701 meets ANSI/BHMA A156.16, L23223</li> <li>▪ U701 is UL10C Listed (90 min)</li> </ul>

#### Dimensions

External diameter	5/8"
-------------------	------



#### Available accessories

- Trim washer available, 3/4" x .032" thick
- Extensions available for thicker doors
- Privacy viewer covers to prevent viewing from outside the room

#### 700/701 and U700/U701 Finishes

BHMA	Description	Substrate	Finish
606	Satin Brass	Brass	B4
613*	Oil Rubbed Bronze	Brass	B10B
619*	Satin Nickel	Brass	B15
622*	Matte Black	Brass	B-BLK
625*	Bright Chrome	Brass	B26
626*	Satin Chrome	Brass	B26D
—	Aged Bronze	Brass	B-643e/716

\*Not available on 700. For other colors, consult factory.